

# Magnetostrictive level transmitter

## Flexible version

### Model FLM-Tx-FLEX

WIKA data sheet LM 20.09



For approvals, see  
page 4

#### Applications

- High-accuracy level detection for almost all liquid media
- Particularly suited for large storage tanks
- Advantageous for installation situations with limited ceiling clearance
- Chemical, petrochemical industry, natural gas, offshore, shipbuilding, machine building, power generating equipment, power plants

#### Special features

- Probe length 1,500 mm ... 22,000 mm [59.06 ... 866.14 in]
- High accuracy of  $\pm 2$  mm [ $\pm 0.08$  in] over a wide measuring range
- Very high resolution of  $< 0.1$  mm [0.004 in]
- Explosion-protected versions possible



Level transmitter in flexible version,  
model FLM-TAI-FLEX

#### Description


The model FLM-Tx-FLEX magnetostrictive level transmitter is used for high-accuracy, continuous level detection of liquids, also with long insertion lengths.

The model FLM-Tx-FLEX is fitted with a flexible probe tube in the form of a stainless steel spiral armour.

At the lower end of the sensor, there is a magnetic foot, which serves both to fix the stainless steel corrugated tube to the tank floor and as a ballast weight. Due to the flexible probe tube, the FLM-Tx-FLEX has an advantage in installation in applications with low ceiling clearances. Transport, due to the flexible design, is also easier than with a rigid probe. Interface measurements are also possible with the flexible version.

# Specifications

## Functionality

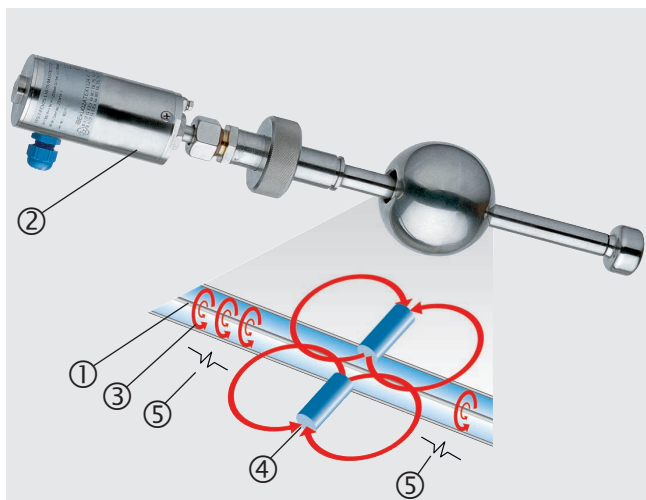

- ① Wire
- ② Sensor housing
- ③ Magnetic field
- ④ Permanent magnet
- ⑤ Torsional wave

## Design and operating principle



- The measurement process is triggered by a current impulse. This current produces a circular magnetic field ③ along a wire ① made of magnetostrictive material which is held under tension inside the corrugated tube.
- At the point being measured (liquid level) there is a float with permanent magnets ④ acting as a position transducer.
- The superposition of these two magnetic fields triggers a mechanical torsional wave ⑤ in the wire.
- This is converted into an electrical signal at the end of the wire in the sensor housing ② by a piezoceramic converter.
- The measured propagation delay enables the origination point of the mechanical wave, and thus the float position, to be determined with high accuracy.

## Overview of versions



Model	Display	Electrical connection	Ex version
FLM-TA-FLEX	Without	Cable gland	-
FLM-TAI-FLEX	Without	Cable gland	Ex ia
FLM-TM-FLEX	Without	M12 connector	-
FLM-TMI-FLEX	Without	M12 connector	Ex ia
FLM-TB-FLEX	LC display	Cable gland	-
FLM-TBI-FLEX	LC display	Cable gland	Ex ia
FLM-TBD-FLEX	LC display	Cable gland	Ex ia/db
FLM-TH-FLEX	LC display with integrated heating	Cable gland	-
FLM-THI-FLEX	LC display with integrated heating	Cable gland	Ex ia
FLM-THD-FLEX	LC display with integrated heating	Cable gland	Ex ia/db

Basic information		
<b>Connection housing</b>		
Material	Stainless steel 1.4305 (303)	
<b>Sensor tube</b>		
Material	Stainless steel 1.4571 (316Ti)	
Diameter	12 mm [0.47 in]	
Length from top to start of flexible corrugated tube	500 mm [19.69 in]	
Length from bottom to start of flexible corrugated tube	500 mm [19.69 in]	
<b>Corrugated tube</b>		
Material	Stainless steel 1.4404 (316L)	
Diameter	12 mm [0.47 in]	
Insertion length	1,500 ... 22,000 mm [59.06 ... 866.14 in]	
<b>Accuracy specifications</b>		
Level	±2 mm [±0.08 in]	
Resolution (HART®)	0.1 mm [0.004 in]	
<b>Process connection</b>		
Thread size	Mounting thread	<ul style="list-style-type: none"> <li>■ G ½ ... G 2"</li> <li>■ ½ NPT ... 2 NPT</li> </ul>
	Mounting flange	<ul style="list-style-type: none"> <li>■ DIN EN DN 50 ... DN 200, PN 6 ... PN 100</li> <li>■ ANSI 2 ... 8", Class 150 ... 600</li> </ul>
	Height-adjustable bite-type fitting	
	→ Other thread sizes on request	
<b>Output signal</b>	4 ... 20 mA / HART® version 6	
<b>IP ingress protection</b>	IP68	
<b>Electrical connection</b>		
Connection type	2-wire	
Cable diameter	5 ... 10 mm [0.2 ... 0.39 in]	
Supply voltage	8 ... 30 V DC	
Electrical output	<ul style="list-style-type: none"> <li>■ Cable gland M16 x 1.5</li> <li>■ Cable gland M20 x 1.5</li> <li>■ M12 connector</li> <li>■ ½ NPT thread for conduit wiring</li> </ul>	
<b>Operating conditions</b>		
Ambient temperature range	-40 ... +85 °C [-40 ... +185 °F]	
Storage temperature range	-40 ... +85 °C [-40 ... +185 °F]	
Process temperature	-40 ... +85 °C [-40 ... +185 °F]	
<b>Other versions</b>	<ul style="list-style-type: none"> <li>■ Interface measurement, with two floats</li> <li>■ Temperature sensors</li> <li>■ Pharmaceutical design, FLM-H ... -FLEX, up to 150 °C [302 °F]</li> </ul>	

## Approvals

Logo	Description	Region
	<b>EU declaration of conformity</b>	European Union
	EMC directive EN 61326 emission (group 1, class B) and immunity (industrial environments)	
	RoHS directive	
	<b>UKCA</b>	United Kingdom
	Electromagnetic compatibility regulations	
	Restriction of hazardous substances (RoHS) regulations	

## Optional approvals

Logo	Description	Region
	<b>EU declaration of conformity</b>	European Union
	ATEX directive Hazardous areas - Ex i Zone 0 gas II 1G Ex ia IIB T6 ... T1 Ga Zone 0/1 gas II 1/2G Ex ia IIB T6 ... T1 Ga/Gb Zone 1 gas II 2G Ex ia IIB T6 ... T1 Gb Zone 1 dust II 2D Ex ia IIIC TX °C Db (see thermal data on approval certificate) - Ex db Zone 0/1 gas II 1/2G Ex ia/db IIB T6 ... T1 Ga/Gb Zone 1 gas II 2G Ex db ia IIB T6 ... T1 Gb Zone 1 dust II 2D Ex ia tb IIIC TX °C Db (see thermal data on approval certificate)	
	<b>IECEX</b>	International
	Hazardous areas - Ex ia Zone 0 gas Ex ia IIB T6 ... T1 Ga Zone 0/1 gas Ex ia IIB T6 ... T1 Ga/Gb Zone 1 gas Ex ia IIB T6 ... T1 Gb Zone 1 dust Ex ia IIIC TX °C Db (see thermal data on approval certificate) - Ex db Zone 0/1 gas Ex ia/db IIB T6 ... T1 Ga/Gb Zone 1 gas Ex db ia IIB T6 ... T1 Gb Zone 1 dust Ex ia tb IIIC TX °C Db (see thermal data on approval certificate)	

## Manufacturer's information and certificates


Logo	Description
	<b>SIL 2</b> Functional safety
-	<b>China RoHS directive</b>

## Certificates

Certificates	
<b>Certificates</b>	<ul style="list-style-type: none"> <li>■ 2.2 test report per EN 10204 (e.g. state-of-the-art manufacturing, material proof, indication accuracy)</li> <li>■ 3.1 inspection certificate per EN 10204 (e.g. material proof for wetted metal parts, indication accuracy, calibration certificate)</li> </ul>


→ For approvals and certificates, see website

Dimensions in mm [in]

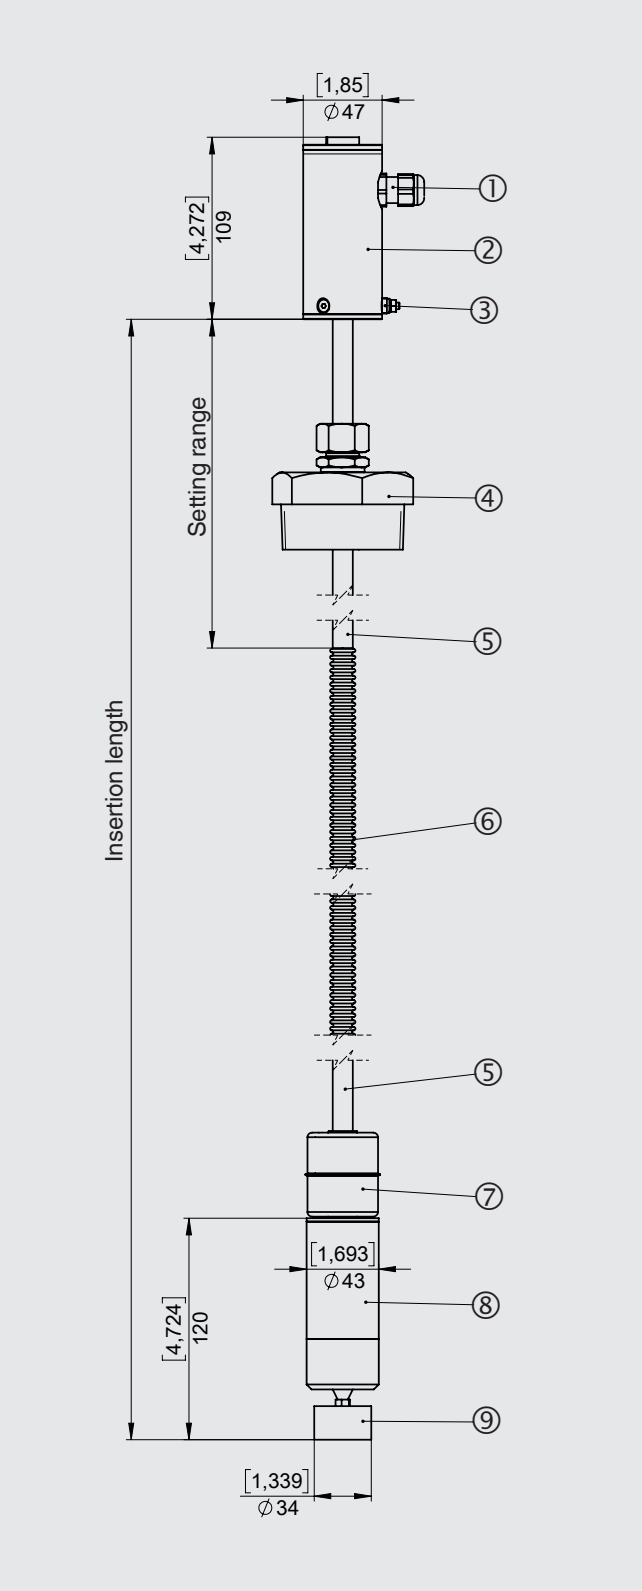

- ① Cable gland
- ② Connection housing
- ③ Equipotential bonding connection
- ④ Process connection
- ⑤ Probe tube  $\varnothing 12 [0.472]$ , stainless steel
- ⑥ Corrugated tube
- ⑦ Float
- ⑧ Weight, stainless steel
- ⑨ Magnetic foot

## Spherical float

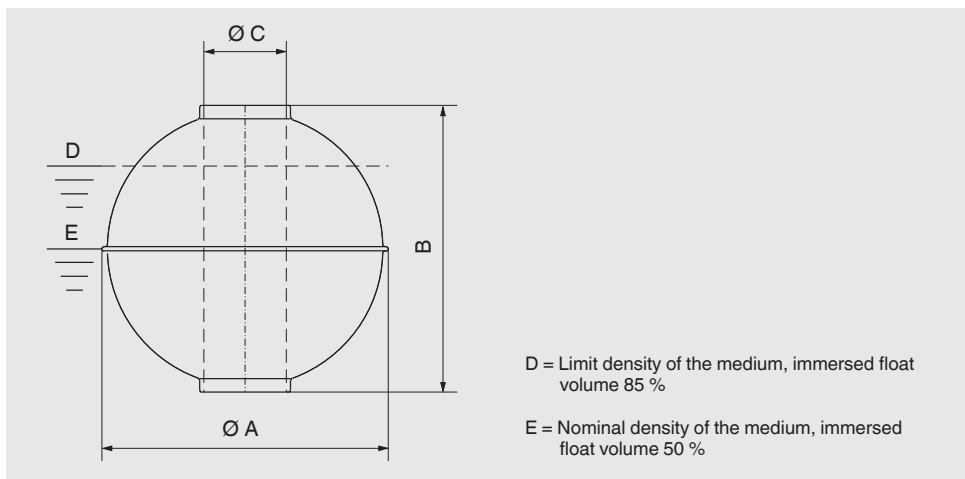


Material	Version	Suits guide tube Ø in mm [in]	Ø A in mm [in]	B in mm [in]	Ø C in mm [in]	Max. operating pressure in bar [psi]	Max. operating temp. in °C [°F]	Limit density 85 % in kg/m <sup>3</sup> [lb/ft <sup>3</sup> ]
<b>Stainless steel 316Ti</b>	V52A	14 [0.55]	52 [2.05]	52 [2.05]	15 [0.59]	40 [580.15]	250 [482]	720 [44.95]
	V62A	14 [0.55]	62 [2.44]	61 [2.4]	15 [0.59]	32 [464.12]	250 [482]	597 [37.27]
	V83A	14 [0.55]	83 [3.27]	81 [3.19]	15 [0.59]	25 [362.59]	250 [482]	430 [26.84]
	V80A	18 [0.71]	80 [3.15]	76 [2.99]	23 [0.91]	25 [362.59]	250 [482]	660 [41.2]
	V98A	18 [0.71]	98 [3.86]	96 [3.78]	23 [0.91]	25 [362.59]	250 [482]	597 [37.27]
	V105A	18 [0.71]	105 [4.13]	103 [4.06]	23 [0.91]	25 [362.59]	250 [482]	533 [33.27]
	V120A	18 [0.71]	120 [4.72]	117 [4.61]	23 [0.91]	25 [362.59]	250 [482]	389 [24.28]
	V120/38A	18 [0.71]	120 [4.72]	116 [4.57]	38 [1.5]	25 [362.59]	250 [482]	537 [33.52]
<b>Titanium 3.7035 (grade 2)</b>	T52A	14 [0.55]	52 [2.05]	52 [2.05]	15 [0.59]	25 [362.59]	250 [482]	570 [35.58]
	T62A	14 [0.55]	62 [2.44]	62 [2.44]	15 [0.59]	25 [362.59]	250 [482]	505 [31.53]
	T83A	14 [0.55]	83 [3.27]	81 [3.19]	15 [0.59]	25 [362.59]	250 [482]	350 [21.85]
	T80A	18 [0.71]	80 [3.15]	76 [3.0]	23 [0.91]	25 [362.59]	250 [482]	665 [41.51]
	T98A	18 [0.71]	98 [3.86]	96 [3.78]	23 [0.91]	25 [362.59]	250 [482]	495 [30.9]
	T105A	18 [0.71]	105 [4.13]	103 [4.06]	23 [0.91]	25 [362.59]	250 [482]	369 [23.04]
	T120A	18 [0.71]	120 [4.72]	117 [4.61]	23 [0.91]	25 [362.59]	250 [482]	329 [20.54]

Special floats for higher temperature and pressure ranges are available on request.

Note: The optimum float will be selected after a feasibility test carried out by WIKA.

## Cylindrical float

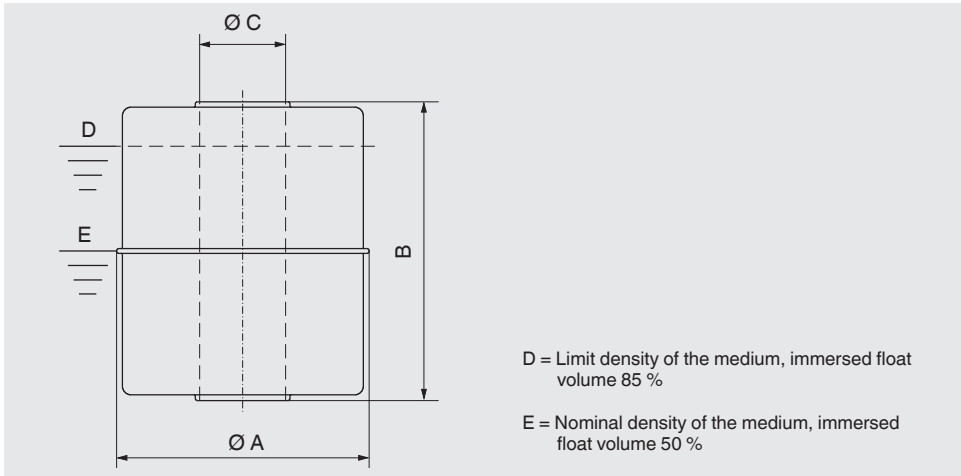

Material	Version	Suits guide tube Ø in mm [in]	Ø A in mm [in]	B in mm [in]	Ø C in mm [in]	Max. operating pressure in bar [psi]	Max. operating temp. in °C [°F]	Limit density 85 % in kg/m <sup>3</sup> [lb/ft <sup>3</sup> ]
Stainless steel 316Ti	V44A	14 [0.55]	44 [1.73]	52 [2.05]	15 [0.59]	16 [232.06]	250 [482]	818 [51.07]
	V44A	14 [0.55]	44 [1.73]	52 [2.05]	15 [0.59]	25 [362.59]	200 [392]	800 [49.94]
Titanium 3.7035 (grade 2)	T44A	14 [0.55]	44 [1.73]	52 [2.05]	15 [0.59]	16 [232.06]	250 [482]	550 [34.34]
PVC	P55A	16 [0.63]	55 [2.17]	54 [2.13]	22 [0.87]	3 [43.51]	60 [140]	798 [49.82]
	P80A	20 [0.79]	80 [3.15]	79 [3.11]	25 [0.98]	3 [43.51]	60 [140]	573 [35.77]
Polypropylene	PP55A	16 [0.63]	55 [2.17]	54 [2.13]	22 [0.87]	3 [43.51]	80 [176]	595 [37.14]
	PP80A	20 [0.79]	80 [3.15]	79 [3.11]	25 [0.98]	3 [43.51]	80 [176]	431 [26.91]
PVDF	PF55A	16 [0.63]	55 [2.17]	69 [2.72]	22 [0.87]	3 [43.51]	100 [212]	821 [51.25]
	PF80A	20 [0.79]	80 [3.15]	79 [3.11]	25 [0.98]	3 [43.51]	100 [212]	681 [42.51]

Special floats for higher temperature and pressure ranges are available on request.

Note: The optimum float will be selected after a feasibility test carried out by WIKA.

### Ordering information

Model / Version / Electrical connection / Process connection / Guide tube diameter / Guide tube length L / 100 % mark L1 / Measuring range M (span 0 ... 100 %) / Process specifications (operating temperature and pressure, limit density) / Options

To order the described product the order number is sufficient.

© 12/2023 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.  
In case of a different interpretation of the translated and the English data sheet, the English wording shall prevail.

